


## Model :

Cameralink : E-VISION\_CL-M-S-XX

## Dimensions:

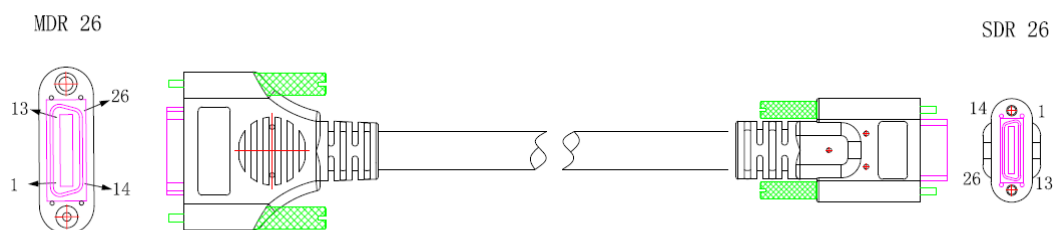

## parameters :

### Physical Specifications

Camera-side interface	MDR
Host-side interfaces	SDR
Cable cross-section	28 AWG
Cable diameter	9.5 ±0.15mm
insulating materials	HD-PE/FM-PE+SKIN/SR-PVC
Housing material	MATT PVC Nitrile PVC
Cable color	Black
Minimum bend radius	95mm
Maximum bending cycle	More than 200W times
Tensile properties	50N

### Electrical Specifications

Maximum operating voltage	30 V
Cable resistance	≤237.25 Ω /km

### Environmental Indicators

Operating temperature range	-20°C-80°C
-----------------------------	------------

### Plug specifications

Durability	>2000 mating cycles
Contact resistance	30 mΩ
Contact plating	gold
Plug insulation	PBT

### Additional Information

RoHS	✓
UL	✓